

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
30 September 2004 (30.09.2004)

PCT

(10) International Publication Number
WO 2004/084048 A1

(51) International Patent Classification⁷: G06F 1/00, 1/14

(21) International Application Number:
PCT/EP2004/000798

(22) International Filing Date: 29 January 2004 (29.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
03 006 246.7 20 March 2003 (20.03.2003) EP

(71) Applicant (for all designated States except US): SONY
ERICSSON MOBILE COMMUNICATION AB
[SE/SE]; Nya Vattentornet, SE-221 88 Lund (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): DAN, Dinescu
[DE/DE]; Felicita-Füss-Strasse 118, 81827 München
(DE).

(74) Agent: KÖRBER, Martin; Mitscherlich & Partner, Son-
nenstrasse 33, Postfach 33 06 09, 80066 München (DE).


(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: MOBILE EQUIPMENT WITH TIME CONTROL FOR DRM SCHEMES

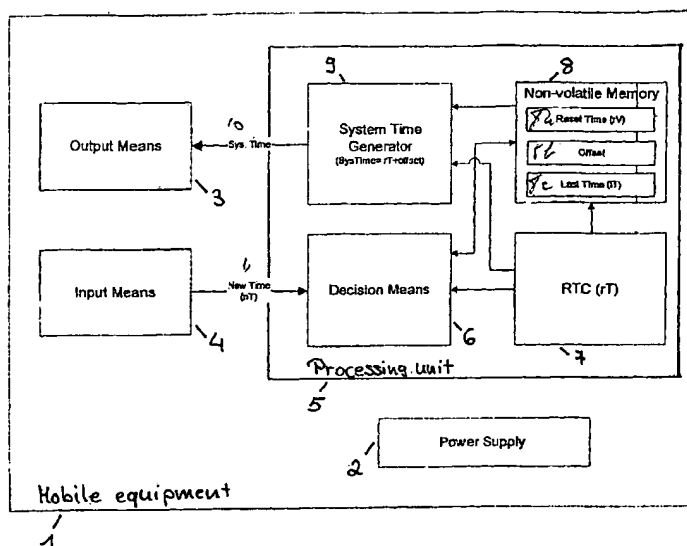

(57) Abstract: The present invention provides a mobile equipment (1) for non stationary use, comprising a real time clock (RTC) (7) integrated in the mobile equipment (1) for generating a real time information, a system time generator (9) integrated in the mobile equipment (1) for generating a system time information by adding an offset to the real time information given by the RTC (7), a non-volatile memory (8) for the permanent storage of data and an input means (4) for inputting instructions for changing the system time information. Hereby, means for limiting the possible changes of the system time information generated by the system time generator (9) to a preset time range and means for limiting the possible reset value of the RTC (7) according to the data stored in the non-volatile memory (8) are provided.

5 **Mobile equipment with time control for DRM schemes**

The invention relates to a mobile equipment with time control system for DRM (digital right management) schemes according to claim 1.

10

The DRM schemes rely on time in order to verify the rendering rights. This results in the necessity of securing the clock in order to force correct application of the content protection rules. For a mobile equipment the securing of the clock is rendered difficult by various issues, e.g. the mobile equipment might not be necessarily registered to a network, the user needs to change the clock in order to adapt it to a different time zone or the user has to set a new time value in case the real time is lost for example during a change of battery. A time control system for mobile equipments is therefore required, which allows the user to change the clock under certain circumstances but limits the possible fraud made to a level, which is considered acceptable, without limiting the functionality of the mobile equipment.

20

A time recording and controlling system for a camera is revealed in document US 5,526,079. It discloses a data recording system for a camera, which records information such as the time, the data, the name and a corporate symbol onto a recording medium used by the camera. If these data are lost, new values must be set by the user. A control system determines, if the new data are considered correct, in this case the new data are accepted. Otherwise the new time and date are not used and the data recording system is stopped or the camera is blocked and cannot be used.

30

The disadvantage of this system is the possible limited functionality of the camera after changing the data, e.g. when the camera still works but without the date and time function or when the camera is shut off completely.

35 It is therefore the object of the present invention to provide a system for mobile equipments, which enable the user to change the time information of the integrated clock within certain limits, without restricting the functionality of the mobile equipment, even if the new time does not lie within the predefined range.

This object is achieved by a system as defined in claim 1. Further embodiments of the invention are set out in the independent claims.

5 According to the present invention a mobile equipment for non stationary use is described comprising a real time clock (RTC) integrated in the mobile equipment for generating a real time information, a system time generator integrated in the mobile equipment for generating a system time information by adding an offset to the real time information given by the RTC , a non-volatile memory for the permanent storage of data and an input means for inputting instructions for changing the system
10 time information.

Hereby, means are provided for limiting the possible changes of the system time information generated by the system time generator (9) to a preset time range and means are provided for limiting the possible reset value of the RTC according to the data stored in the non-volatile memory.

15 Advantageously the system comprises a power supply for the mobile equipment.

Further, advantageously the system comprises an output means for outputting the system time information generated by the system time generator.

20 Preferably the changed new system time is not allowed to differ from the real time information given by the RTC by more than a predefined value.

The predefined value can be a fixed value in minutes.

25 The predefined value can be dependent from a given inaccuracy of the time information generated by the RTC.

Further advantageously the time information of the RTC is stored periodically in the
30 non-volatile memory.

Preferably the reset value of the RTC is not allowed to be earlier than the last stored time value in the non-volatile memory. The reset value is also stored in the non-volatile memory.

35 Advantageously the reset value is stored in the non-volatile memory.

Embodiments of the invention will now be described, by way of example only, with reference to the accompanying drawing in which:

Fig. 1 is a block diagram showing schematically the elements of the system and

Fig. 2 is a flowchart showing the process of changing the time information.

5

Referring to figure 1 the present invention comprises a mobile equipment 1 for non stationary use, e.g. a portable computer, a personal digital assistant (PDA), a mobile phone or recording devices.

10 Integrated in this mobile equipment 1 is a power supply 2. This may be one or more exchangeable batteries, rechargeable batteries, solar cells or a combination of these. So an almost continuous power supply with no or only little interruptions is possible.

Further, the mobile equipment 1 comprises an input means 4 and an output means 3.
15 The input means 4, for instance a keypad, a touchpad, a mouse, recognition of speech, an interface for wireless transmission, e.g. via infrared, or for transmission with different means, e.g. a serial cable, enables the user to input data or information. The output means 3 may be a display, a loudspeaker, an interface for a printer, a fax or for connection to another portable or stationary device, outputs
20 information, data or programs.

In addition, the mobile equipment 1 contains a processing unit 5 for handling data. The processing unit 5 comprises components and programs for receiving, reading, transferring, processing, storing or deleting data or information.

A real time clock (RTC) 7 serves for generating a real time and/or date information.

25 Further, a system time generator 9 generates a system time by adding an offset to the real time information given by the RTC 7 and submits this system time information to the output means 3.

Further, during power supply the time information of the RTC 7 is periodically stored in a non-volatile memory 8, which serves for the permanent storage of data or
30 information and permits no deletion of the data stored in it by the user. In addition, also the offset to the real time is stored in the non-volatile memory.

It is possible for the user to input a new or changed time and/or date information for the system time. To prevent fraud or errors, the entering of a new time is restricted
35 by certain conditions. Therefore, the new time information input by the user is transmitted to a decision means 6, which checks the new time and decides, whether it is accepted or discarded.

The limitations of the new time information for the system time generated by the user are set out in the following.

In case, that the power supply for the RTC 7 was interrupted, e.g. when the battery was changed or not recharged, or when a malfunction of the power supply 2 occurs, the time information of the RTC 7 is deleted or gets lost. As mentioned above, the time of the RTC 7 during power supply is periodically stored in the non-volatile memory 8, which maintains this time information even during interruption of power supply. If the user after the lost of the time of the RTC 7 inputs a reset value for the RTC 7, this value is not allowed to be earlier than the last time information stored in the non-volatile memory. This condition can be expressed in the following inequality

$$IT \leq rV,$$

where IT is the last time stored in the non-volatile memory and rV is the reset value input by the user. If the reset value passes the check of the decision means 6, then the reset value will be stored in the non-volatile memory 8 and used to change the RTC value. The real time offset will be set to 0 in the non-volatile memory 8. After resetting the RTC 7 to the reset value, the RTC 7 again starts generating a real time information which is periodically stored in the non-volatile memory.

A further limitation provides, that the new system time information input by the user lies within a predefined interval or range, or that the new system time is not allowed to differ from the real time generated by the RTC 7 by more than a predefined value. This condition can be expressed by the following inequality, whereby the new time nT inserted by the user depends on the real time rT generated by the RTC 7 according to

$$rT - x \leq nT \leq rT + x,$$

where x is a predefined value in minutes. Hereby, it is only possible for the user to change the system time information generated by the system time generator 9, but not the real time information given by the RTC 7. If the user enters a new system time, and the new time lies within the given range, then the system time is changed by changing the offset of the RTC 7.

For example in case of travelling, the user must be able to change the system time when registering to a network in a different time zone. Hereby, a sensible value for

x would be 24*60 minutes. This covers changes for all time zones including passing the date change meridian.

Another example is the clock change. If the system time of the mobile equipment 1 does not change automatically from summertime to wintertime or conversely, the user must be able to change the system time accordingly. In this case a sensible value for x would be 60 minutes.

The RTC 7 of the mobile equipment may have a certain inaccuracy, which then after a certain time passed results in an incorrect time information. The user therefore has the possibility, e.g. once a month, to change the system time information generated by the system time generator 9 or the real time information of the RTC 7 within a certain time range or interval, which depends on the inaccuracy given for the RTC 7: The higher the inaccuracy is, the wider is the interval or range for the allowed new time information. This condition can be expressed by the following inequality, whereby the new time nT depends on the real time rT given by the RTC 7 according to

$$rT - a(rT - rV) - x \leq nT \leq rT - a(rT - rV) + x,$$

a is the inaccuracy of the time information given by the RTC 7, x is a predefined value in minutes and rV is the initial time used when the RTC 7 has been reset and has been stored in the non-volatile memory 8. Hereby, the value of the new time and the real time if necessary are e.g. converted from an absolute time and date into a value in minutes or seconds and inversely in order to facilitate the calculations.

If the new system time passes the verification of the decision means, then the offset to the RTC 7 time is updated as nT - rT, stored in the non-volatile memory and used to output a new system time by adding the new offset to the real time given by the RTC 7. This has the disadvantage, that with increasing time, e.g. after a few years, also the interval for the new time nT increases.

Therefore another possible function may be, that the real time information of the RTC 7 itself is changed by setting the real time value to the input new time value and setting the offset to 0. This has the advantage, that the interval for the possible new value nT does not change, this solution is therefore more accurate. In this second approach, the same verifications of the decision means 6 have to be performed.

With reference to figure 2, the steps for changing the system time by the user, are the following: The beginning of the procedure, e.g. the switching on of the mobile equipment 1, is indicated by the step S0. In a second step S1 it is checked, if the RTC 7 did loose power. If not, then in a step S2 the output means 3 outputs the
5 current system time as real time given by the RTC 7 and the offset. Otherwise, if the RTC 7 lost power, the user in the step S9 inputs a reset value as new system time. In the next step S10 the decision means 6 checks, if the new time is later than the last time stored in the non-volatile memory 8. If not, then the process goes back to step S9 and the user has to input a new reset value time. Otherwise, according to step
10 S11, the RTC 7 is set to the new time, the reset value is stored in the non-volatile memory 8, the offset is set to 0 and also stored in the non-volatile memory and the periodical storage of the real time information given by the RTC 7 is started. In the next step S2 the output means 3 outputs the current system time as real time given by the RTC 7 and the offset. If the user inputs a new system time in the step S3, this
15 new system time is transmitted to the decision means 6 in a next step S4, where it is checked in step S5, if the new time lies within the predefined range. If not, the process returns to step S2 and the output means 3 outputs the current unchanged time. Otherwise, the new offset is computed and stored in the non-volatile memory in the step S6. In the next step S7 the output means 3 then outputs the system time as
20 real time given by the RTC 7 and the changed offset. In a last step S8 the procedure ends, e.g. by switching off the mobile equipment 1.

5

Claims

1. Mobile equipment (1) for non stationary use, comprising
10 a real time clock (RTC) (7) integrated in the mobile equipment (1) for generating a real time information,
a system time generator (9) integrated in the mobile equipment for generating a system time information by adding an offset to the real time information given by the RTC (7),
15 a non-volatile memory (8) for the permanent storage of data and
an input means (4) for inputting instructions for changing the system time information,
characterized by
means for limiting the possible changes of the system time information generated by
20 the system time generator (9) to a preset time range and
means for limiting the possible reset value of the RTC (7) according to the data stored in the non-volatile memory (8).
2. System according to claim 1,
25 **characterized in,**
that the system comprises a power supply (2) for the mobile equipment (1).
3. System according to claim 1 or 2,
characterized in,
30 that the system comprises an output means (3) for outputting the system time information generated by the system time generator (9).
4. System according to claim 1, 2 or 3,
characterized in,
35 that the changed new system time is not allowed to differ from the real time information given by the RTC (7) by more than a predefined value.
5. System according to claim 4,
characterized in,

that the predefined value is a fixed value in minutes.

6. System according to claim 4 or 5,
characterized in,

5 that the predefined value is dependent from a given inaccuracy of the time information generated by the RTC (7).

7. System according to one of the claims 1 to 6,
characterized in,

10 that the time information of the RTC (7) is stored periodically in the non-volatile memory (8).

8. System according to one of the preceding claims,
characterized in,

15 that the reset value of the RTC (7) is not allowed to be earlier than the last stored time value in the non-volatile memory (8).

9. System according to one of the preceding claims,
characterized in,

20 that the reset value is stored in the non-volatile memory (8).

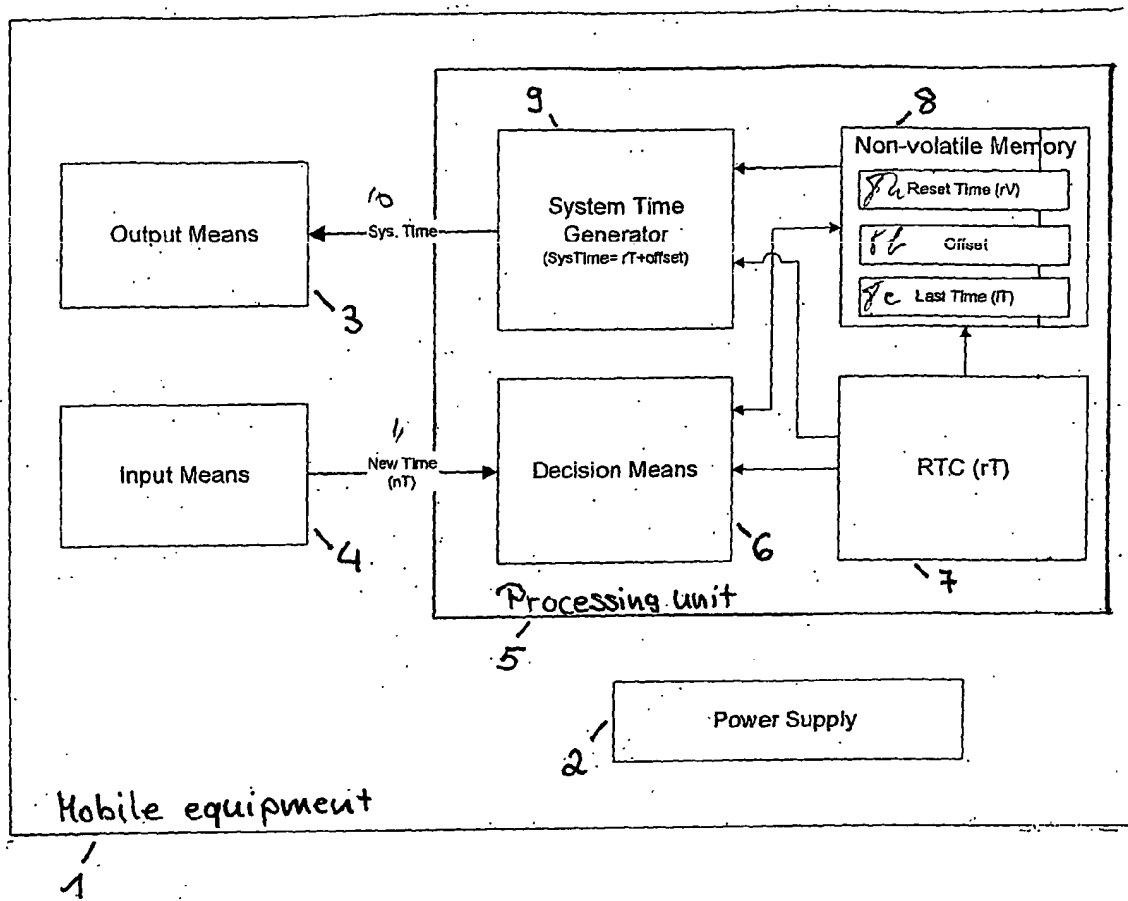


Fig. 1

S0

S1

S2

S3

S4

S5

S6

S7

S8

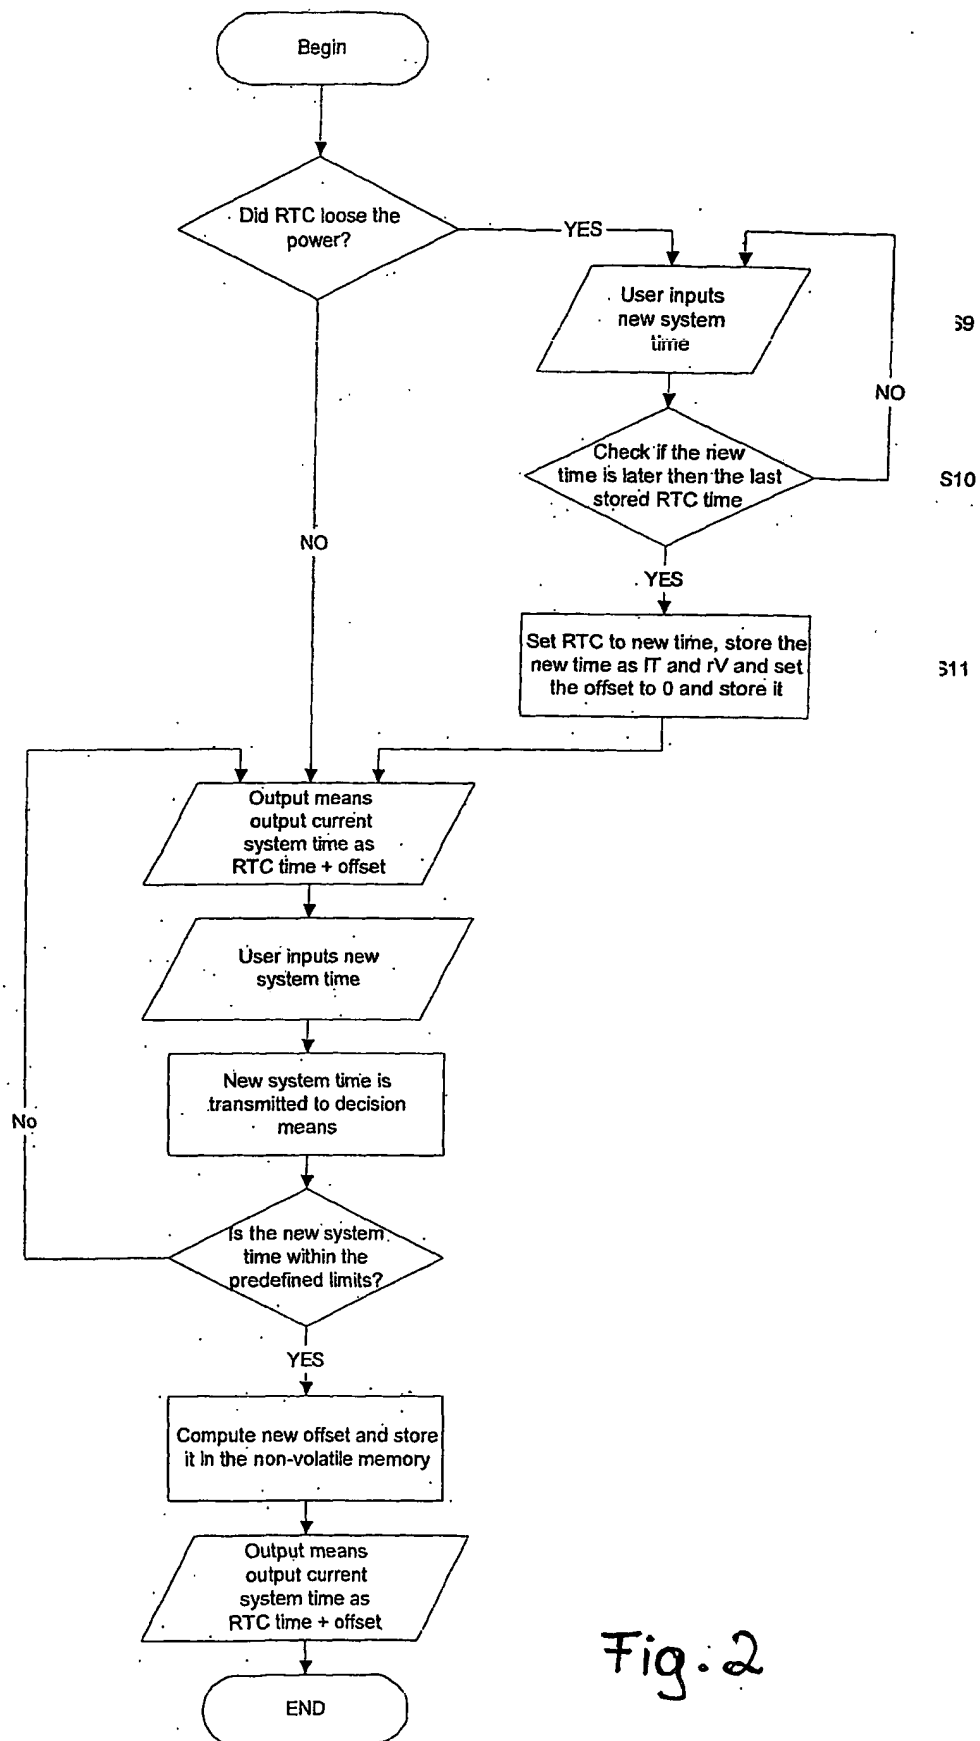


Fig. 2

INTERNATIONAL SEARCH REPORT

PCT/EP2004/000798

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G06F1/00 G06F1/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F G07C G04G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/004875 A1 (KRAMER GERALD ARTHUR ET AL) 2 January 2003 (2003-01-02) page 2, paragraph 28 page 6, paragraph 53 page 7, paragraph 65 page 8, paragraph 67 - paragraph 74 ----	1-9
X	US 6 470 449 B1 (BLANDFORD ROBERT ROY) 22 October 2002 (2002-10-22) column 5, line 48 column 6, line 37 - line 60 ----	1-9
A	US 6 393 263 B1 (HAYASHI KEISAKU) 21 May 2002 (2002-05-21) the whole document -----	1

☐

Further documents are listed in the continuation of box C.

☒

Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

4 May 2004

Date of mailing of the international search report

24/05/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ciarelli, N

INTERNATIONAL SEARCH REPORT

PCT/EP2004/000798

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003004875 A1	02-01-2003	US 2002198834 A1 US 2002123964 A1	26-12-2002 05-09-2002
US 6470449 B1	22-10-2002	US 5347579 A US 5189700 A US 6442691 B1 AU 6354894 A CA 2156604 A1 EP 0746922 A1 WO 9419884 A1 WO 9212485 A1	13-09-1994 23-02-1993 27-08-2002 14-09-1994 01-09-1994 11-12-1996 01-09-1994 23-07-1992
US 6393263 B1	21-05-2002	JP 3225915 B2 JP 11234758 A	05-11-2001 27-08-1999